

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/095930 A1

(51) International Patent Classification⁷: **G01N 21/892**,
G01M 11/00, G01N 21/896, G02B 6/00

(74) Agents: **KOBAYASHI, Kazunori** et al.; Taiyo Seimei Ot-
suka Bldg. 3F, 25-1, Kita-Otsuka 2-chome, Toshima-ku,
Tokyo 1700004 (JP).

(21) International Application Number:
PCT/JP2005/006573

(22) International Filing Date: 29 March 2005 (29.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-100657 30 March 2004 (30.03.2004) JP

(71) Applicant (for all designated States except US): **FUJII
PHOTO FILM CO., LTD.** [JP/JP]; 210, Nakanuma,
Minami-ashigara-shi, Kanagawa, 2500123 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AOSHIMA,
Shinsuke** [JP/JP]; c/o Fuji Photo Film Co., Ltd., 200,
Onakazato, Fujinomiya-shi, Shizuoka, 4180044 (JP).
HIGAKI, Shinji [JP/JP]; c/o Hamamatsu Metrix Co.,
Ltd., 4-10-10, Shinmiyakoda 1-chome, Hamamatsu-shi,
Shizuoka, 4312103 (JP). **SHIBANO, Yoshiaki** [JP/JP];
c/o Hamamatsu Metrix Co., Ltd., 4-10-10, Shinmiyakoda
1-chome, Hamamatsu-shi, Shizuoka, 4312103 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR DETECTING DEFECT IN OPTICAL FIBER, AND PLASTIC OPTICAL FIBER
MANUFACTURING APPARATUS

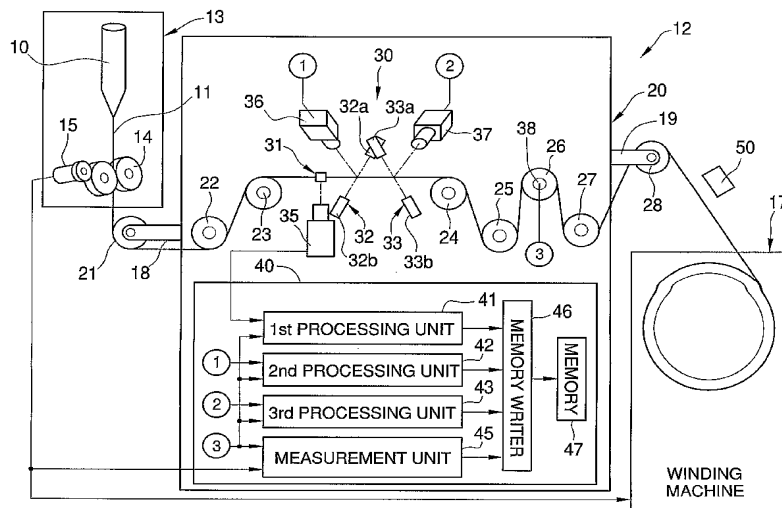

(57) Abstract: While a plastic optical fiber (POF) strand (11) is guided by guide pulleys (21-28) toward a winding machine (17), an internal defect in the POF strand (11) is detected by a defect detection apparatus (20). The defect detection apparatus (20) comprises three light illumination devices (31-33), line sensor cameras (35-37) and processing units (41-43). The light illumination devices (31-33) illuminate the POF strand (11), and the line sensor cameras (35-37) take an image of the POF strand (11) and send the image data to the processing units (41-43). The processing units (41-43) set a detection range, and specify the defect pixels in the obtained image based on the intensity of the image. Then, a blob process is carried out to combine the adjacent defect pixels, and determine the existence of the internal defect and specify the defect type based on the size of the combined defect area.

WO 2005/095930 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.